

PC Board Sockets

Strips of Sub-Miniature Sockets

- Sub-miniature sockets using the four finger Beryllium Copper contact, mounted on carrier strips for ease of production use.
- See previous page for information on the individual sockets.




SINGLE-IN-LINE SOCKET CARRIERS

CALCULATION

A	$B + 1.8$
B	$2.54 \times (\text{No. of sockets} - 1)$

- Brass carriers are supplied fitted with the sub-miniature socket shown in the tables below.
- Supplied in standard lengths.

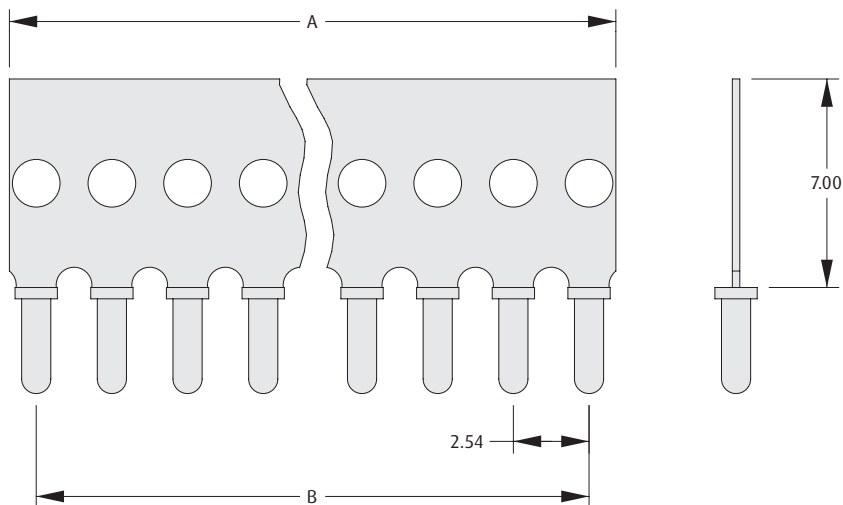

HOW TO ORDER

D01 - 9XX XX 01

SERIES CODE

TYPE

979	Single-in-line Socket Carrier with H3192-01
982	Single-in-line Socket Carrier with H3191-01
984	Single-in-line Socket Carrier with H3155-01
990	Single-in-line Socket Carrier with H3153-01

FINISH

01 Gold contact, Tin shell

NO. OF CONTACTS PER STRIP

04, 06 to 10, 12, 14, 16, 20, 32

All dimensions in mm.