



MultiConnect[®] AEW

Analog-to-Ethernet/Wireless Converter

FEATURES

- Configurable WAN (Cellular or Ethernet)
- Set-up wizard
- Serial port configuration
- Certified in North America, European Union, and Australia/New Zealand
- Supports packet data and PPP pass-through modes
- RJ-11 port provides dial tone and DTMF detection
- Supports analog modem connections from 300 baud to 33.6K bps with error correction and data compression
- Plastic chassis for indoor environments
- Outbound and inbound calling
- LEDs for visual monitoring of power, signal strength, and phone line status · No RS-232 port for use with external modem
- SSL Encryption / Open VPN
- Two-year warranty

BENEFITS


- Analog-to-Ethernet/wireless migration
- Converts phone number to IP address
- Connects legacy dial-up devices to cellular or wired Internet network

The MultiConnect[®] AEW analog-to-Ethernet/wireless converter is a convenient turnkey solution that allows legacy equipment with built-in analog modems to connect to the cellular packet data network. By emulating the traditional dial-up PSTN network and using integrated or external cellular modems, the affordable MultiConnect AEW converter gives new life to devices currently using traditional analog dial-up communications.

Devices & Data with Analog Modems



Connecting Your Devices

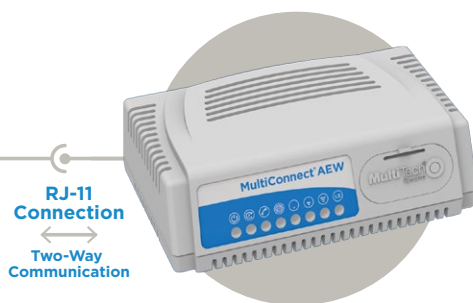

Insight + Action + Control



SPECIFICATIONS

Model	MT200A2EW-H5
Performance	HSPA+
Frequency Band (MHz)	Penta band 850/900/1700/1900/2100 MHz
Packet Data*	HSDPA data service of up to 21.0 Mbps HSUPA data service of up to 5.76 Mbps
Circuit Switched Data	Up to 14.4 Kbps, non-transparent
Power Requirements	
Voltage	9V to 32V DC @ 400mA
Connectors	
Rf Antenna Connector	50 ohm SMA (female connector)
IP Ethernet	WAN: RJ-45, 10/100 Base T
SIM Connector	Standard 1.8 and 3V SIM receptacle
Dial Connector	RJ11
Command Connector	DE9 (female connector)
Power	2.5mm miniature (screw-on)
Physical Description	
Physical Dimensions (L x W x H)	2.89" x 4.75" x 1.58" (73.4 x 120.6 x 40.1 millimeters)
Physical Weight	0.325 lbs (0.147 Kg)
Chassis Type	Plastic
Environmental	
Operating Temperature	-22° to 167° F (-30° to 75° C)
Storage Temperature	-40° to 185° F (-40° to 85° C)
Relative Humidity	Relative humidity 20% to 90% noncondensing
Certifications	
Regulatory	FCC Class B (US), R&TTE (EU Economic Area), IC (Canada), ACMA/RCM (AU/NZ), IFT (Mexico)
Safety	UL60950-1, cUL60950-1, IEC60950-1, AS/NZS60950-1
Network	PTCRB, AT&T

HIGHLIGHTS

Applications

The MultiConnect AEW converter is targeted at applications that have an integrated analog modem as part of the solution, but need to utilize the cellular network for connectivity to their host application. Some examples include:

- Automated teller machines (ATMs)
- Home healthcare monitors
- Security systems
- Credit card/POS terminals
- Kiosks
- Industrial automation/utilities

Legacy PSTN Connectivity Alternative

As it becomes more and more difficult to find analog phone lines in homes and businesses, and analog networks are being sunset, device manufacturers are faced with a problem of finding new ways to connect their legacy analog devices to newer digital communication networks. The MultiConnect AEW converter seamlessly integrates with these types of devices allowing them to connect to the cellular network without requiring any changes to the remote device. Simply plug the RJ-11 cable from the existing device into the MultiConnect AEW converter, enter a few configuration commands through the RS-232 serial port and you are ready to go.

ORDERING INFORMATION

Model	Description	Accessories Included*	Region
MT200A2EW-H5-WW	3G Analog-to-Ethernet/Wireless Converter	Yes	Global

* Accessory Kit include power supply, antenna and cables.

SERVICES & WARRANTY

MultiTech's comprehensive Support Services programs offer a full array of options to suit your specific needs. These services are aimed at protecting your investment, extending the life of your solution or product, and reducing total cost of ownership. Our seasoned technical experts, with an average tenure of more than 10 years, can walk you through smooth installations, troubleshoot issues and help you with configurations.

INSTALLATION SUPPORT

MultiTech's Installation Support Service delivers priority service with the ability to work one-on-one with an experienced MultiTech technical support engineer, to guide you through the installation process for our products.

TECHNICAL SUPPORT SERVICES

At MultiTech, we're committed to providing you personalized attention and quality service while providing you a quick response to your product support needs. We have several options of support for you to choose from.

For additional information on Support Services as well as other service offerings, please contact your MultiTech representative or visit www.multitech.com/support.go

World Headquarters

Multi-Tech Systems, Inc.
2205 Woodale Drive
Mounds View, MN 55112 U.S.A.
Tel: 763-785-3500
Toll-Free: 800-328-9717
Email: sales@multitech.com
www.multitech.com

EMEA Headquarters

Multi-Tech Systems (EMEA)
Strata House
264-270 Bath Road
Harlington UB3 5JJ
United Kingdom
Tel: +(44) 118 959 7774
Email: sales@multitech.co.uk
www.multitech.co.uk

Produced in the U.S. of U.S. and non-U.S. components. Features and specifications are subject to change without notice.

Trademarks and Registered Trademarks: MultiTech and the MultiTech logo, MultiConnect: Multi-Tech Systems, Inc. All other products and technologies are the trademarks or registered trademarks of their respective holders.

2016-11 • 86002188 • © 2016 Multi-Tech Systems, Inc. All rights reserved.

